



**IP 67**

230V-250V  
50Hz

230V-250V  
60Hz

Type		Light source	Light source power	Weight
230V - 250V / 50Hz	230V - 250V / 60Hz			
VGP 76 - 1250	VGP 76 - 1251	sodium or metal-halide lamp	1 x 250 W	10,6 kg
VGP 76 - 1400	VGP 76 - 1401		1 x 400 W	10,8 kg
VGP 76 - 2250	VGP 76 - 2251		2 x 250 W	18,4 kg
VGP 76 - 2400	VGP 76 - 2401		2 x 400 W	19,4 kg

**Application**  
decks and holds, industrial areas

**Approvals**  
according to the rules of  
relevant classification societies, additional  
IEC

**Housing**  
stainless steel, powder coated white

**Electric**  
flexible wiring, heat  
resistant up to +105°C,



**Cable entry**  
max. 4 cable glands, brass, M 24x1.5,  
with earthing insert

**Mounting**  
4 mounting holes,  $\phi$ 10mm

**Electrical connection**  
see finish section

**Remarks**  
floodlight has to be ordered  
separately

**1.07**

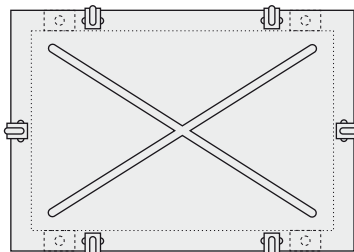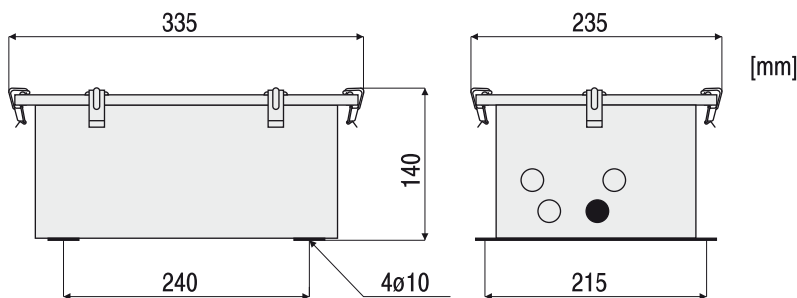

## OPTIONS

SC-Glands  
for screen  
cable = 